

# Technical Data

## 400 Series

## 403D-11G

### Electropak

#### Basic technical data

Number of cylinders .....	3
Cylinder arrangement.....	Vertical in-line
Cycle .....	four stroke
Induction system .....	Naturally aspirated
Compression ratio .....	23:1
Bore.....	77 mm
Stroke.....	81 mm
Cubic capacity.....	1-131 litres
Direction of rotation.....	anti-clockwise when viewed from flywheel
Firing order.....	1, 2, 3
Estimated total weight of Electropak (dry) .....	129,2 kg

#### Overall dimensions of Electropak

-height .....	700 mm
-length .....	776 mm
-width .....	449 mm

#### Moments of inertia (GD<sup>2</sup>)

-engine rotational components. ....	TBA kg m <sup>2</sup>
-flywheel .....	1,51 kg m <sup>2</sup>

#### Centre of gravity (fan face to flywheel housing)

-forward from rear of block.....	98 mm
-above crank centre line.....	67 mm
-offset to RHS of centre line .....	2 mm

#### Performance

##### General installation

**Note:** All data based on operation to ISO 3046-1:2002 standard reference conditions

Speed variation at constant load - G2.....	± 0,75%
Cyclic irregularity .....	
-at 110% stand-by power .....	TBA

#### Test conditions

-air temperature.....	25 °C
-barometric pressure .....	100 kPa
-relative humidity .....	31.5%
-air inlet restriction at maximum power (nominal).....	3 kPa
-exhaust back pressure at maximum power (nominal).....	10,2 kPa
-fuel temperature (inlet pump).....	40 °C


#### Sound level

Average sound pressure level for bare engine (without inlet and exhaust) at 1 metre ... 78,5 dB(A)  
 -all ratings certified to within ... ± 5%  
 If the engine is to operate in ambient conditions other than those of the test conditions, suitable adjustments must be made for these changes. For full details, contact Perkins Technical Service Department.


**Emissions Statement:** Certified against the requirements of EU2007 (EU 97/68/EC Stage II) and EPA Tier 4 (EPA 40 CFR Part 1039 Tier 4 legislation for non-road mobile machinery, powered by constant speed engines

Designation	Units	Type of operation and application	
		Prime	Stand-by
Gross engine power	kWb	10,7	11,8
ElectropaK net engine power	kWm	10,3	11,4
Brake mean effective pressure	kPa	TBA	TBA
Engine coolant flow (Water Pump Ratio 1.285:1)	l/min	32,5	
Combustion air flow	m <sup>3</sup> /min	0,9	
Exhaust gas flow (max.)	m <sup>3</sup> /min	2-21	2,4
Exhaust gas temperature (max. )	°C	437	515
Overall thermal efficiency (nett)	%	32	31
Typical genset electrical output (0.8 pf 25 °C)	kWe	9,0	9,9
	kVA	11,2	12,4
Assumed alternator efficiency	%	87	
<b>Energy balance</b>			
Energy in fuel	kWt	31,8	37,8
Energy in power output (gross)	kWb	10,7	11,8
Energy to cooling fan	kWm	0,4	0,4
Energy in power output (nett)	kWt	10,3	11,4
Energy to coolant and lubricating oil	kWt	10,2	12,1
Energy to exhaust	kWt	8,9	10,8
Energy to radiation	kWt	2,6	3,1


403D-11G ElectropaK, left side view

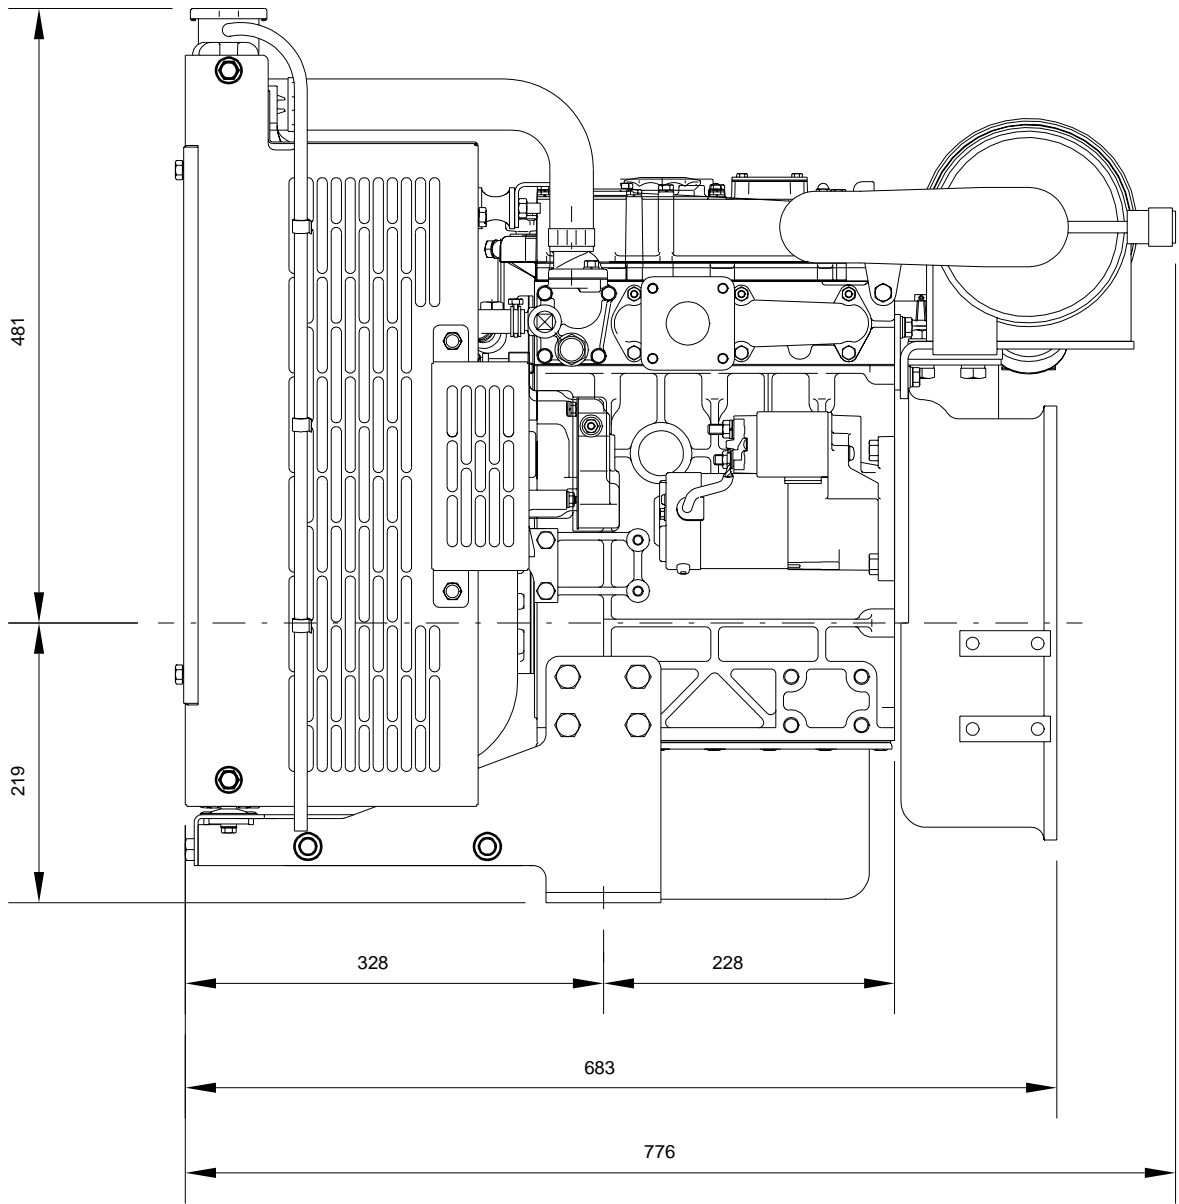

403D-11G ElectropaK, front view

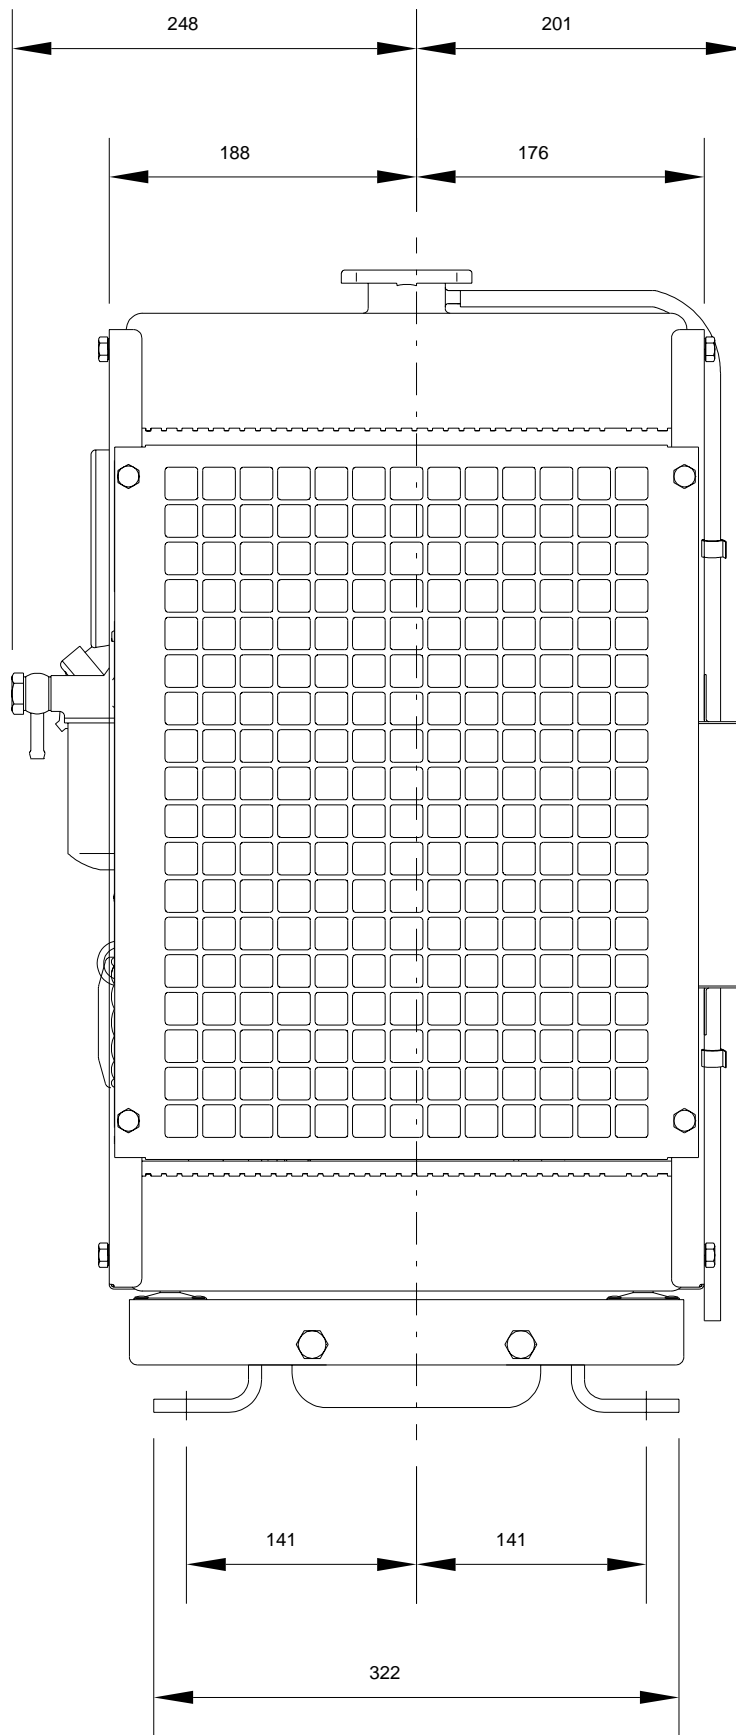

403D-11G ElectropaK, plan view

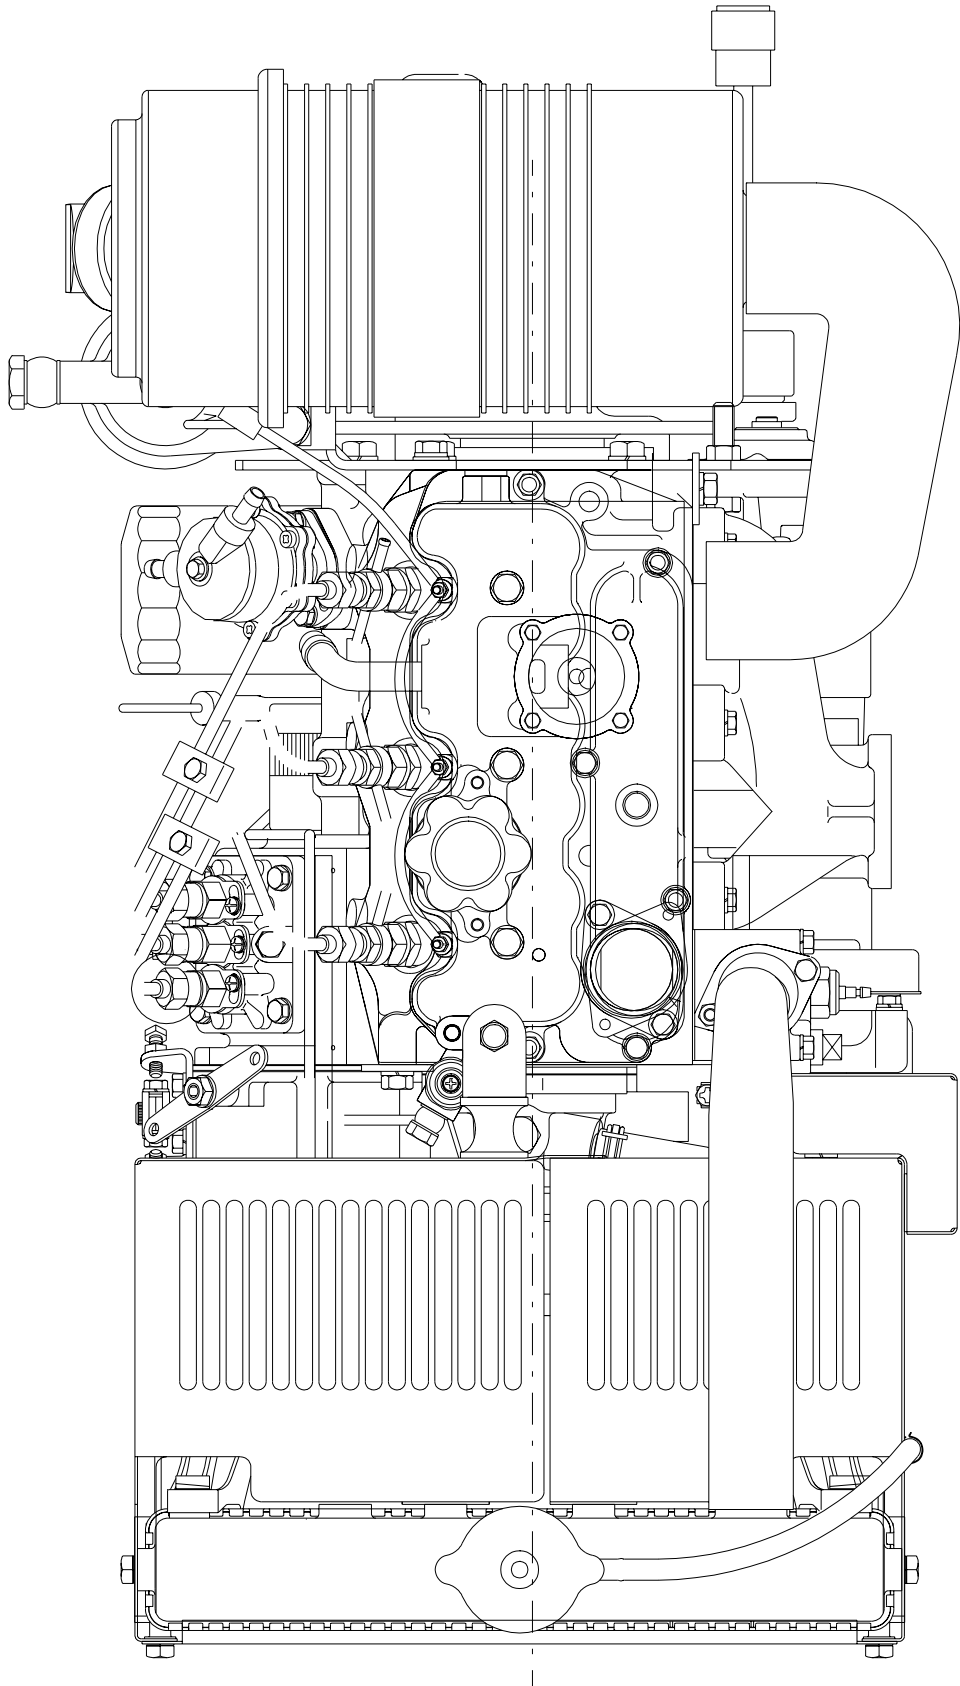

## Cooling system

### Radiator

-face area ..... 0,147 m<sup>2</sup>  
 -rows and materials ..... 2 rows, Aluminium  
 -matrix density and material ..... 14,5 FPI, Aluminium  
 -width of matrix ..... 334 mm  
 -height of matrix ..... 440 mm  
 -pressure cap setting ..... 90 kPa  
 Estimated cooling air flow reserve ..... 0,125 kPa

### Fan

-diameter ..... 320 mm  
 -drive ratio ..... 1,285:1  
 -number of blades ..... 7  
 -material ..... Plastic  
 -type ..... Pusher

### Coolant

Total system capacity  
 -with radiator ..... 5,2 litres  
 -without radiator ..... 1,9 litres  
 Maximum top tank temperature ..... 112 °C  
 Temperature rise across engine ..... TBA °C  
 Max permissible external system resistance ..... TBA kPa  
 Thermostat operation range ..... 75 - 87°C  
 Recommended coolant: 50% anti freeze / 50% water. For complete details of recommended coolant specifications, refer to the Operation and Maintenance Manual for this engine model

### Duct allowance

Maximum additional restriction (duct allowance) to cooling airflow and resultant minimum airflow		
Ambient clearance 50% Glycol	Duct allowance Pa	m <sup>3</sup> /sec
53°C	0	0,75
46°C	125	0,59

## Electrical System

-alternator ..... 15 amps, 12 V  
 -starter motor ..... 1,1 kW, 12 V

### Cold start recommendations

Minimum cranking speed ..... TBA rev/min

Minimum starting temperature °C	Grade of engine lubricating oil	Battery specifications			
		BS3911 Cold start amps	SAEJ537 Cold cranking amps	Number of batteries needed	Commercial ref number
0	20W	340	540	1	069
-15	10W	340	540	1	069
-20	5W	420	590	1	072

## Exhaust system

Maximum back pressure ..... 10,2 kPa  
 Exhaust outlet size  
 -horizontal ..... 34 mm  
 -vertical ..... 40 mm

## Fuel system

Type of injection ..... Indirect injection  
 Fuel injection pump ..... Cassette type  
 Fuel injector ..... Pintle nozzle  
 Nozzle opening pressure ..... 14.7 MPa

### Fuel lift pump

-flow/hour ..... 63 litres/hr  
 -pressure ..... 10 kPa  
 Maximum suction head ..... 0,8 m  
 Maximum static pressure head ..... 3,0 m  
 Governor type ..... Mechanical

### Fuel specification

**USA Fed Off Highway - EPA2D 89.330-96**

**Europe Off Highway - CEC RF-06-99**

**Note:** For further information on fuel specifications and restrictions, refer to the OMM Fuels section for this engine model

### Fuel consumption

Power rating			
g/kWh			
110%	100%	75%	50%
268	248	257	280

**Induction system**

**Maximum air intake restriction**

- clean filter ... 3,0 kPa
- dirty filter ... 6,4 kPa
- air filter type ... Dry element type

**Lubrication system**

**Lubricating oil capacity**


- Total system ... 4,9 litres
- Minimum... 3,4 litres
- Maximum engine operating angles
- front up, front down, right side or left side... 35° continuous

**Lubricating oil pressure**

- relief valve opens ... 304 - 500 kPa
- at maximum no-load speed. ... TBA
- Normal oil temperature. ... 125 °C
- oil consumption at full load (as a % of fuel consumption) ...

**Recommended SAE viscosity**

A single or multigrade oil must be used which conforms API-CH-4 or ACEA E5.

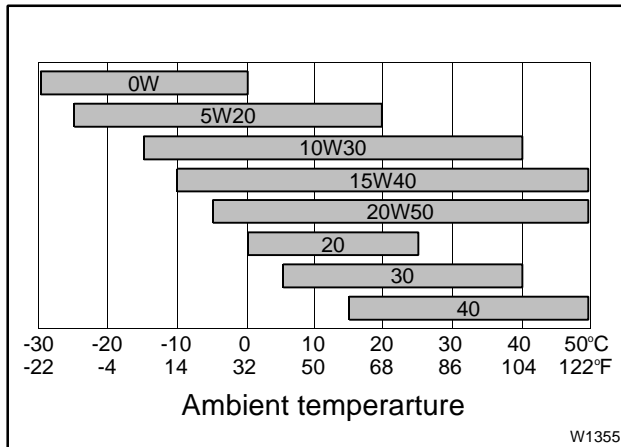

**Maximum static bending moment**

at rear face of block... 500 Nm

**Load acceptance**

The below complies with the requirements of classification 3 and 4 of ISO 8528-12 and G2 operating limits stated in ISO 8528-5

Initial load application: When engine reaches rated speed (15 seconds maximum after engine starts to crank)		
Descriptor	Units	60 Hz
% of prime power	%	tba
Load	kWm (kWe)	tba
Transient frequency deviation	%	
Frequency recovery	Seconds	tba

The above figures were obtained under the following test conditions:

- minimum engine block temperature ... tba °C
- ambient temperature ... tba °C
- governing mode ... isochronous
- alternator inertia ... tba kgm<sup>2</sup>
- under frequency roll off (UFRO) point set to ... 1 Hz below rated
- UFRO rate set to ... 2% voltage / 1% frequency
- LAM on/off ... off

All tests were conducted using an engine which was installed and serviced to Perkins Engines Company Limited recommendations.

**Note:** The general arrangement drawings shown in this data sheet are for guidance only. For installation purposes, latest versions should be requested from the Applications Dept., Perkins Engines Stafford, ST16 3UB United Kingdom.



**Perkins Engines Company Limited**

Peterborough PE1 5NA United Kingdom  
 Telephone +44 (0) 1733 583000  
 Fax +44 (0) 1733 582240  
 www.perkins.com

All information in the document is substantially correct at the time of printing but may be subsequently altered by the company.

Distributed by