


STAMFORD[®]

UCI224F - Winding 06

Technical Data Sheet

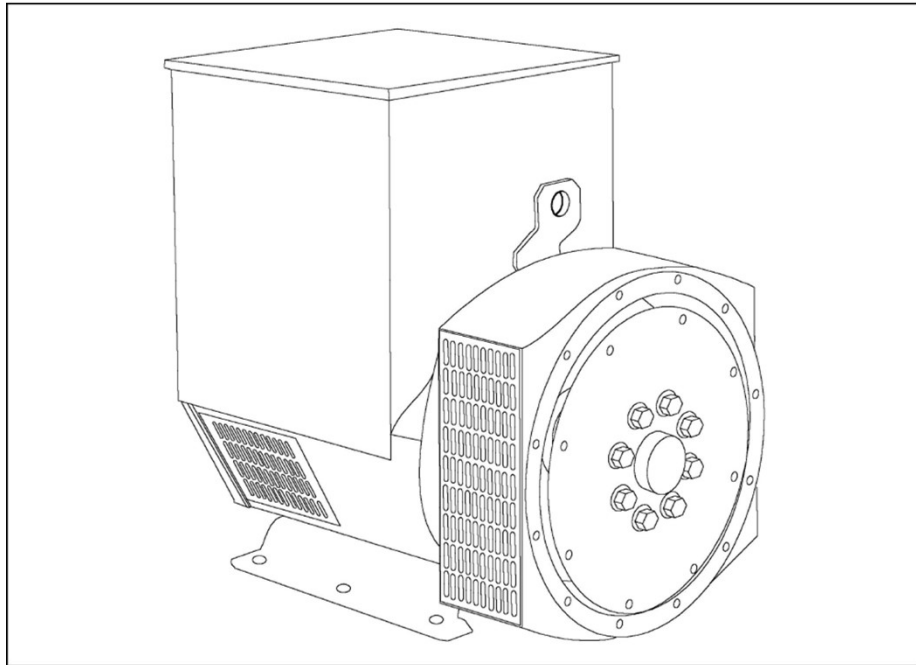

SPECIFICATIONS & OPTIONS

STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

VOLTAGE REGULATORS**SX460 AVR - OBSOLETE**

With this self excited control system the main stator supplies power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semiconductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three phase full wave bridge rectifier. This rectifier is protected by a surge suppressor against surges caused, for example, by short circuit.

AS440 AVR

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The AS440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally over voltage protection built-in and short circuit current level adjustments as an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Dedicated Single Phase windings have 4 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

DE RATES

All values tabulated on page 7 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

WINDING 06

| | | | |
|-------------------------|--|---------|--------------------------|
| CONTROL SYSTEM | SEPARATELY EXCITED BY P.M.G. | | |
| A.V.R. | MX341 | MX321 | |
| VOLTAGE REGULATION | ± 1% | ± 0.5 % | With 4% ENGINE GOVERNING |
| SUSTAINED SHORT CIRCUIT | REFER TO SHORT CIRCUIT DECREMENT CURVES (page 6) | | |

| | | | |
|-------------------------|---|---------|--------------------------|
| CONTROL SYSTEM | SELF EXCITED | | |
| A.V.R. | SX460 | AS440 | |
| VOLTAGE REGULATION | ± 1.0 % | ± 1.0 % | With 4% ENGINE GOVERNING |
| SUSTAINED SHORT CIRCUIT | SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT | | |

| | | | |
|---------------------------|---|--|--|
| INSULATION SYSTEM | CLASS H | | |
| PROTECTION | IP23 | | |
| RATED POWER FACTOR | 0.8 | | |
| STATOR WINDING | SINGLE LAYER CONCENTRIC | | |
| WINDING PITCH | TWO THIRDS | | |
| WINDING LEADS | 4 | | |
| MAIN STATOR RESISTANCE | 0.024 Ohms AT 22°C SERIES CONNECTED | | |
| MAIN ROTOR RESISTANCE | 0.83 Ohms at 22°C | | |
| EXCITER STATOR RESISTANCE | 20 Ohms at 22°C | | |
| EXCITER ROTOR RESISTANCE | 0.078 Ohms PER PHASE AT 22°C | | |
| R.F.I. SUPPRESSION | BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others | | |
| WAVEFORM DISTORTION | NO LOAD < 1.5% NON-DISTORTING LINEAR LOAD < 5.0% | | |
| MAXIMUM OVERSPEED | 2250 Rev/Min | | |
| BEARING DRIVE END | BALL. 6312-2RS (ISO) | | |
| BEARING NON-DRIVE END | BALL. 6309-2RS (ISO) | | |

| | 1 BEARING | 2 BEARING |
|-----------------------------|-------------------------|-------------------------|
| WEIGHT COMP. GENERATOR | 337 kg | 350 kg |
| WEIGHT WOUND STATOR | 120 kg | 120 kg |
| WEIGHT WOUND ROTOR | 110.7 kg | 102.3 kg |
| WR ² INERTIA | 0.6071 kgm ² | 0.5754 kgm ² |
| SHIPPING WEIGHTS in a crate | 360 kg | 371 kg |
| PACKING CRATE SIZE | 105 x 57 x 96(cm) | 105 x 57 x 96(cm) |

| | | |
|------------------------|-----------------------------------|--------|
| TELEPHONE INTERFERENCE | THF<2% | TIF<50 |
| COOLING AIR | 0.281 m ³ /sec 595 cfm | |

| | | | |
|---|------|------|------|
| VOLTAGE SERIES | 220 | 230 | 240 |
| VOLTAGE PARALLEL | 110 | 115 | 120 |
| KVA BASE RATING FOR REACTANCE VALUES | 60 | 60 | 60 |
| X _d DIR. AXIS SYNCHRONOUS | 2.95 | 2.70 | 2.48 |
| X' _d DIR. AXIS TRANSIENT | 0.24 | 0.22 | 0.20 |
| X'' _d DIR. AXIS SUBTRANSIENT | 0.17 | 0.15 | 0.14 |
| X _q QUAD. AXIS REACTANCE | 1.36 | 1.25 | 1.14 |
| X' _q QUAD. AXIS SUBTRANSIENT | 0.15 | 0.14 | 0.13 |
| X _L LEAKAGE REACTANCE | 0.09 | 0.08 | 0.07 |
| X ₂ NEGATIVE SEQUENCE | 0.15 | 0.14 | 0.13 |
| X ₀ ZERO SEQUENCE | 0.11 | 0.10 | 0.10 |

REACTANCES ARE SATURATED




| | |
|---|------------------|
| T' _d TRANSIENT TIME CONST. | 0.03s |
| T'' _d SUB-TRANSTIME CONST. | 0.008s |
| T' _{do} O.C. FIELD TIME CONST. | 0.75s |
| T _a ARMATURE TIME CONST. | 0.0065s |
| SHORT CIRCUIT RATIO | 1/X _d |

UCI224F

STAMFORD

Winding 06

SINGLE PHASE EFFICIENCY CURVES

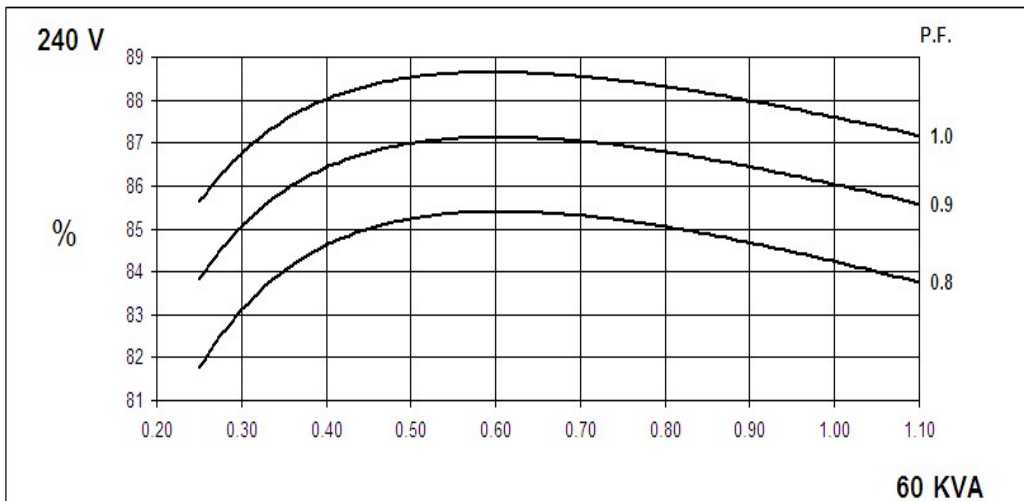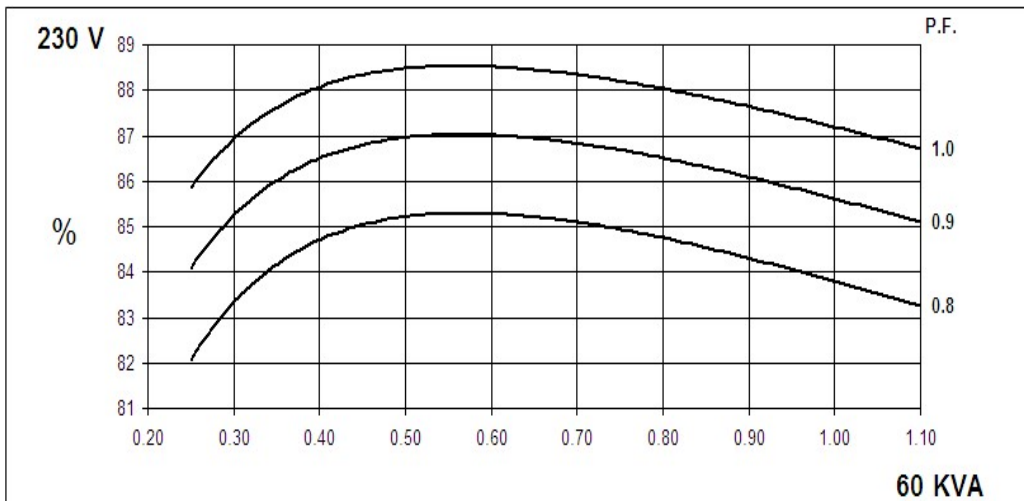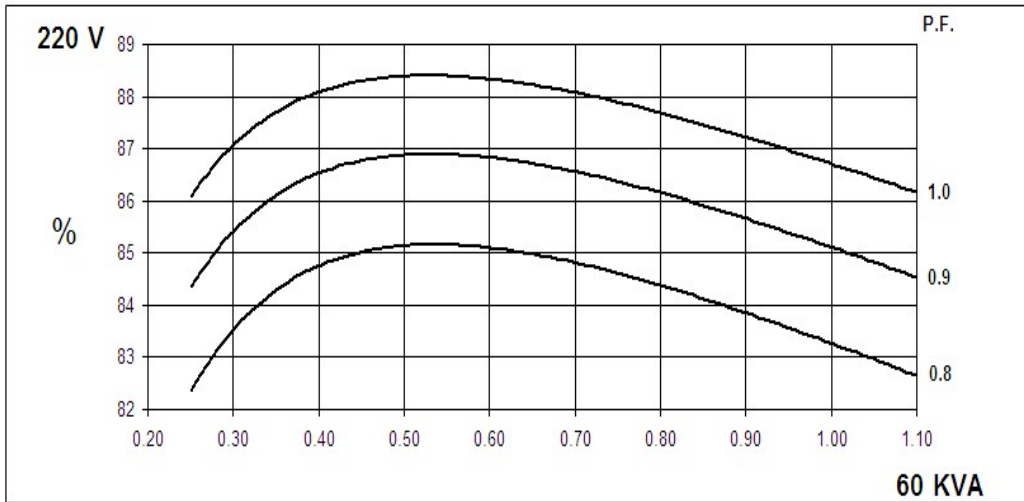


UCI224F

STAMFORD


Winding 06

SX

Locked Rotor Motor Starting Curves

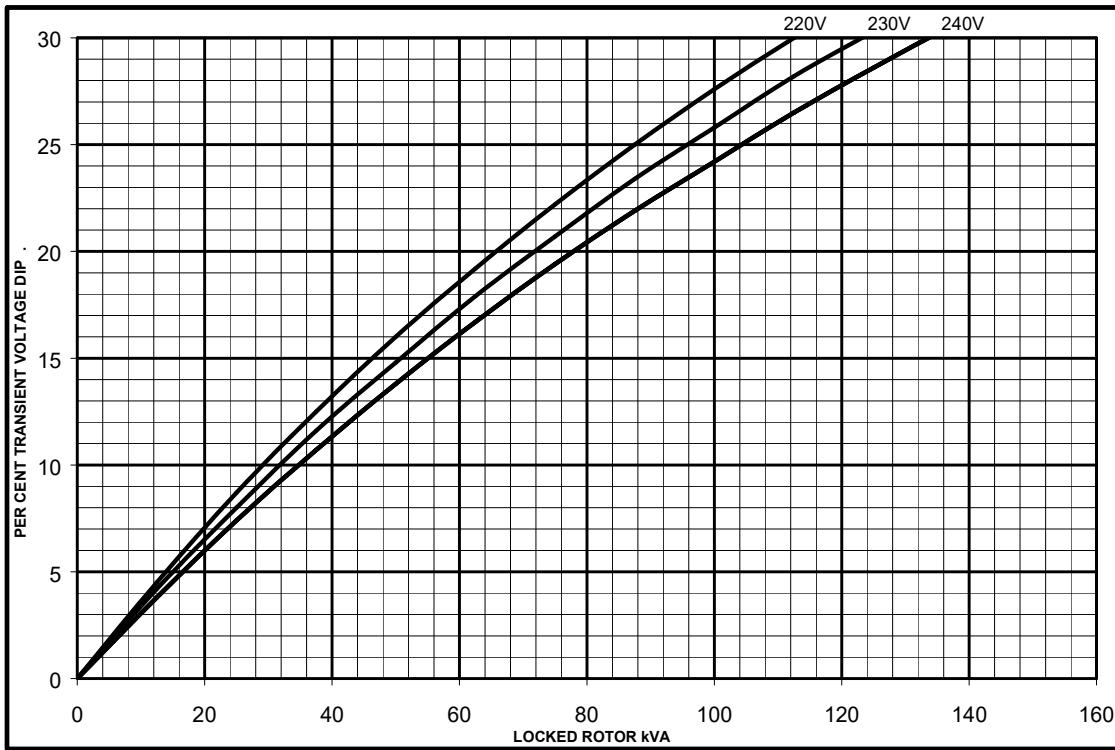


MX

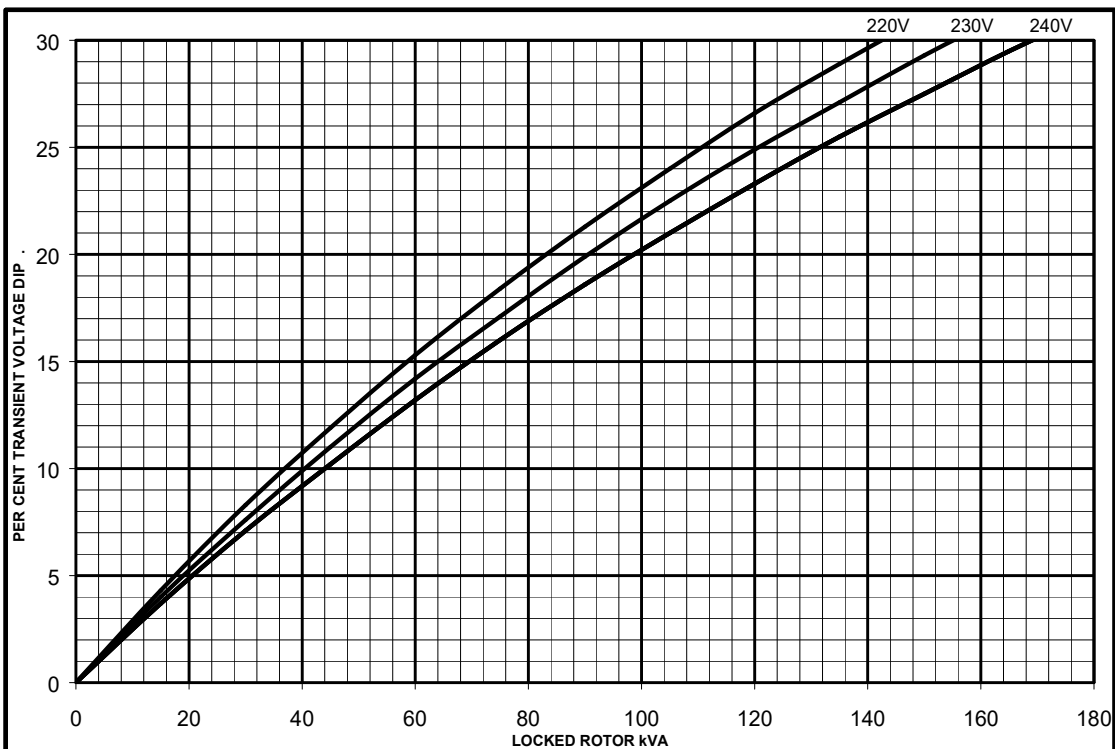

UCI224F
Winding 06

STAMFORD

**Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on series connection.**

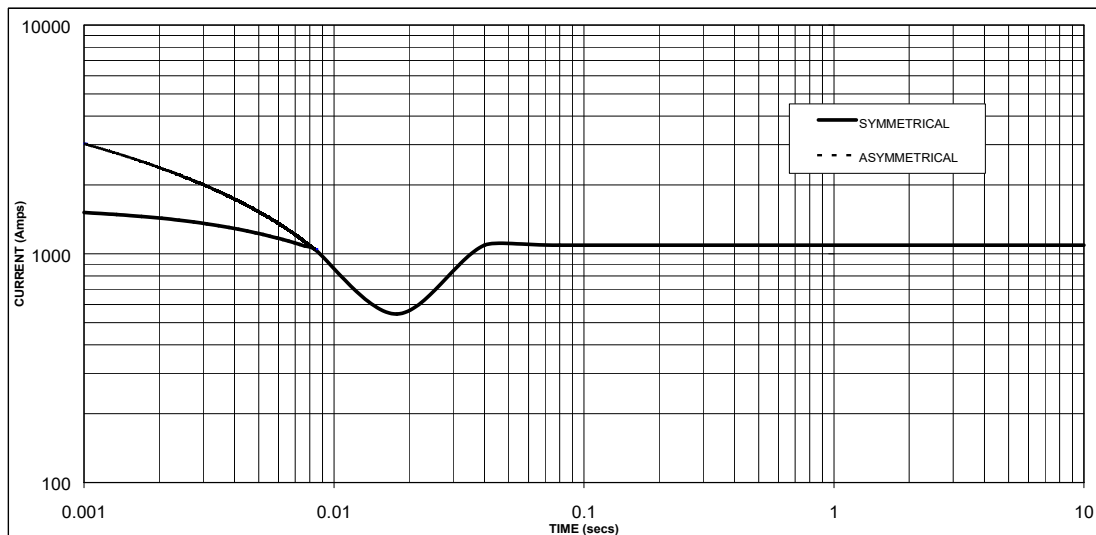

Sustained Short Circuit = 1090 Amps

Note

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

| Voltage | Factor |
|---------|--------|
| 220V | X 1.00 |
| 230V | X 1.05 |
| 240V | X 1.09 |

The sustained current value is constant irrespective of voltage level

UCI224F

STAMFORD

Winding 06

60Hz

RATINGS

| Class - Temp Rise | Cont. F - 105/40°C | | | Cont. H - 125/40°C | | | Cont. F - 105/40°C | | | Cont. H - 125/40°C | | |
|-------------------|--------------------|------|------|--------------------|------|------|--------------------|------|------|--------------------|------|------|
| | 0.8pf | | | 0.8pf | | | 1.0pf | | | 1.0pf | | |
| Series (V) | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 | 220 | 230 | 240 |
| Parallel (V) | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 | 110 | 115 | 120 |
| kVA | 56.9 | 56.9 | 56.9 | 60.0 | 60.0 | 60.0 | 56.9 | 56.9 | 56.9 | 60.0 | 60.0 | 60.0 |
| kW | 45.5 | 45.5 | 45.5 | 48.0 | 48.0 | 48.0 | 56.9 | 56.9 | 56.9 | 60.0 | 60.0 | 60.0 |
| Efficiency (%) | 83.6 | 84.1 | 84.5 | 83.3 | 83.8 | 84.2 | 87.0 | 87.4 | 87.8 | 86.7 | 87.2 | 87.6 |
| kW Input | 54.5 | 54.2 | 53.9 | 57.6 | 57.3 | 57.0 | 65.4 | 65.1 | 64.8 | 69.2 | 68.8 | 68.5 |

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings

STAMFORD

www.stamford-avk.com

Copyright 2022, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.