



Dongfeng Cummins Technical Operations

Engine Model : QSZ13-G6

Curve and Datasheet : FR20379

Rev03 2016.4



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6

Curve Number

FR20379

CPL Code

3836

Compression Ratio: 17:1

Cylinders: 6

Bore: 130 mm

Stroke: 163 mm

Displacement: 13.0 L

Engine Configuration: D0C3004GX03

Fuel System: HPCR

Aspiration: Turbocharged & Charge Air Cooled

Governor Regulation: ≤1%

Emission Certification: Euro StageIII/ MEP StageIII


Engine Ratings*:

Engine Speed r/min	Standby Power		Prime Power		Continuous Power	
	bhp	kWm	bhp	kWm	bhp	kWm
1500	501	374	439	328	395	295
1800	549	410	482	360	432	323

* All ratings refer to AEB26.02.


Engine Fuel Consumption @1500 r/min

OUTPUT POWER			FUEL CONSUMPTION			
%	bhp	kWm	lb/bhp.h	g/kWm.h	gal/h	l/h
Standby Power						
100	501	374	0.344	209	24.0	90.9
Prime Power						
100	439	328	0.352	214	21.5	81.6
75	329	246	0.372	226	17.1	64.6
50	220	164	0.405	246	12.4	46.9
25	110	82	0.442	269	6.8	25.6
continuous Power						
100	395	295	0.359	218	19.7	74.8

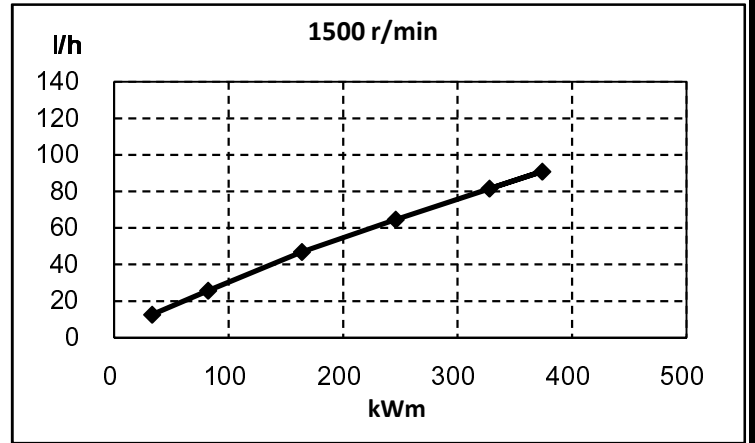

Engine Fuel Consumption @1800 r/min

OUTPUT POWER			FUEL CONSUMPTION			
%	bhp	kWm	lb/bhp.h	g/kWm.h	gal/h	l/h
Standby Power						
100	549	410	0.345	210	26.4	100.1
Prime Power						
100	482	360	0.349	212	23.4	88.7
75	362	270	0.360	219	18.1	68.8
50	241	180	0.395	240	13.3	50.2
25	121	90	0.488	297	8.2	31.1
continuous Power						
100	432	323	0.336	204	20.2	76.6

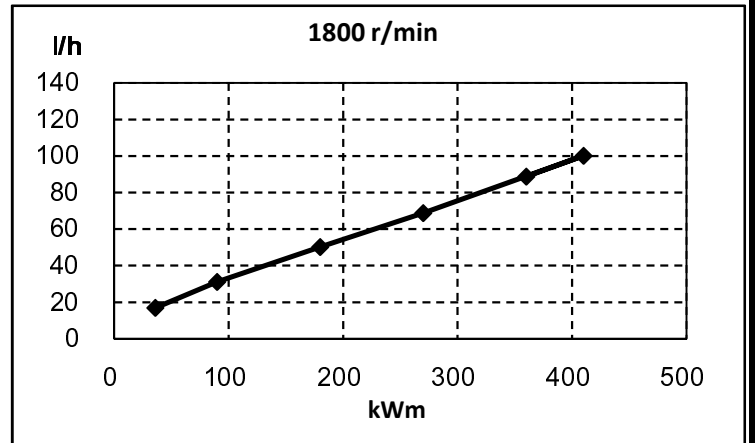

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 29.61 in Hg (100 kPa) barometric pressure [263 ft (80 m) altitude], 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1 kPa) water vapor pressure with No. 2 diesel fuel.

All data obtained is based on the engine operating, under the test conditions of 14.9 in H₂O (3.7kPa) inlet air restriction and 2.95 in Hg (10 kPa) exhaust restriction, not included are alternator, fan, optional equipment and driven components.

The engine may be operated up to 5200 m (17,060 ft.) altitude.



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6


Curve Number

FR20379


CPL Code

3836


Power Derate Curves @1500 r/min
Standby Power

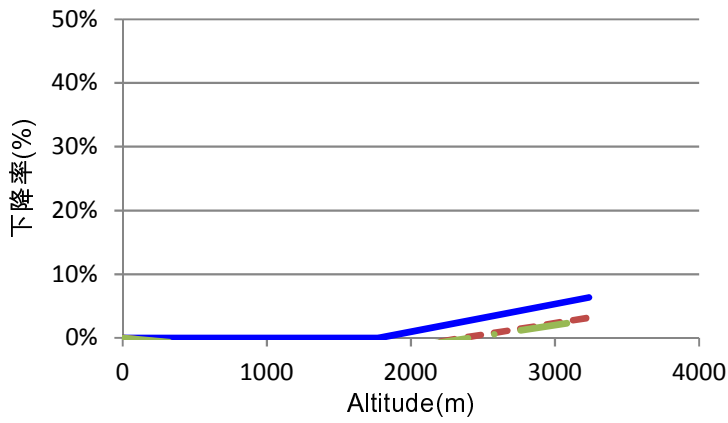


Power Derate Curves @1800 r/min
Standby Power

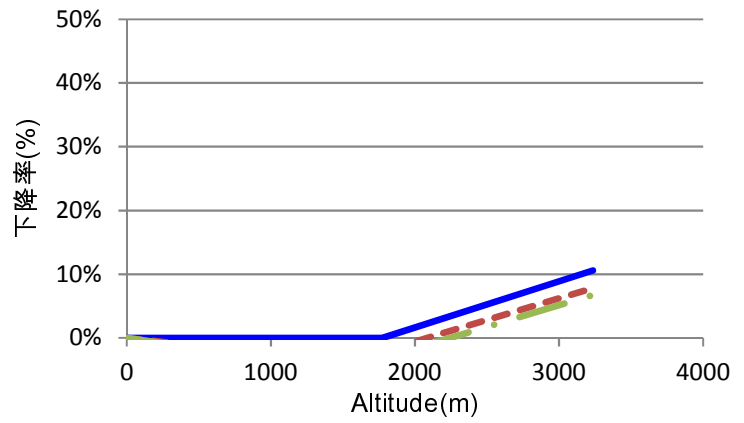


Prime Power

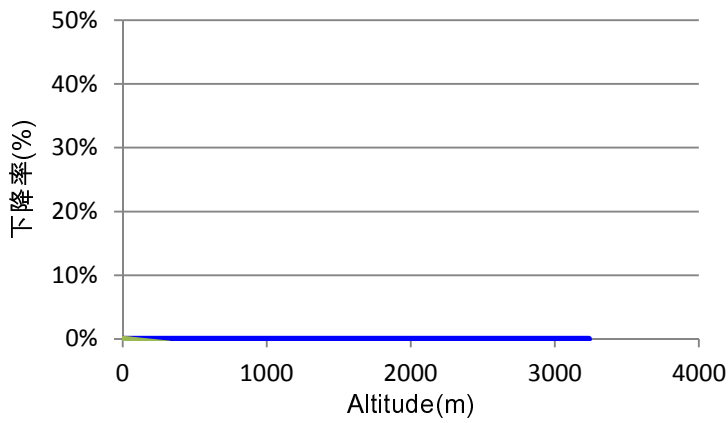


Prime Power

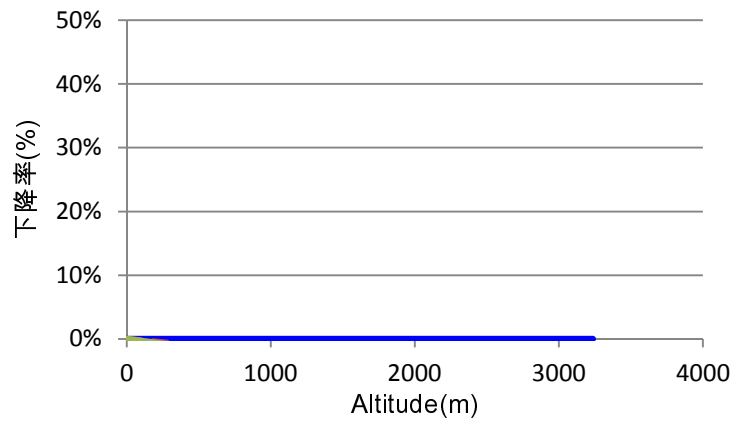

Continuous Power

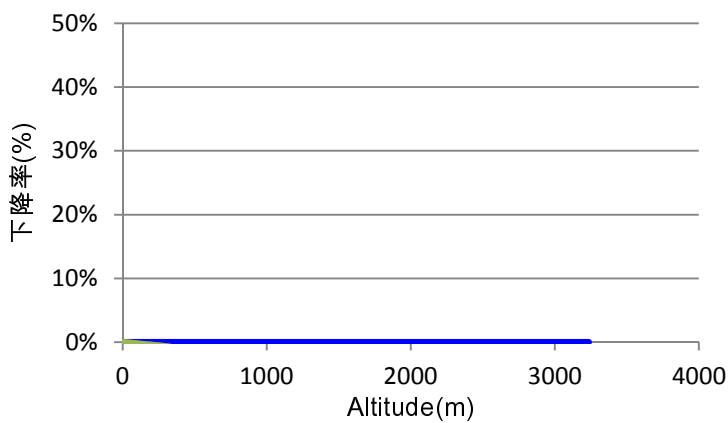

Continuous Power

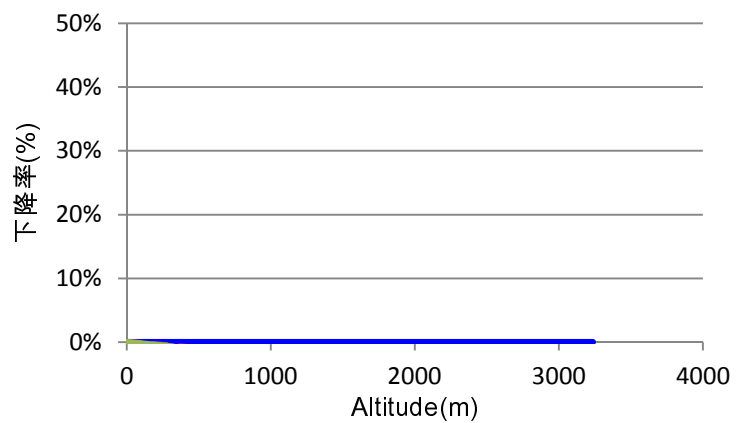

— 25 °C (77°F) - - - 15 °C (59°F) ··· 5 °C (41°F)

Engine tested under the ISA conditions of 50 deg C charge temperature, 3.7kPa inlet air restriction and 10 kPa exhaust restriction.



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6

Curve Number

FR20379

CPL Code

3836

GENERAL ENGINE DATA

Type:	Four cycle; Inline; 6 Cylinder
Aspiration:	Turbocharged Charge Air Cooled
Compression Ratio:	17:1
Fire Order:	1-5-3-6-2-4
Bore x Stroke:	- mm 130 x 163
Displacement:	- L 13.0
Low Idle Speed:	- r/min 700
Maximum altitude for continuous operation:	- m 5200
Approximate Engine Weight - Dry:	- kg 1245
Approximate Engine Weight - Wet:	- kg 1310
Center of Gravity from front face of block:	- mm 519
Center of Gravity above crankshaft centerline:	- mm 201
Rotation inertia of Complete Engine (without flywheel):	- kg.m ² 1.48

ENGINE MOUNTING

Maximum static mounting surface bending moment	
Rear face of block:	- N.m 1356
Maximum static bending moment of FAN:	- N.m 21
Maximum allowable weight on Engine Support:	- kg 1500

AIR INDUCTION SYSTEM

Whole air intake pipe size (recommendatory):	- mm 200
Charge air cooler pipe size (recommendatory):	- mm 115
Maximum temperature rise between ambient air and engine air inlet:	- °C 11.1
Maximum Temp. Rise Between Engine Air Intake and Intake Manifold:	- °C 30
Maximum Intake Manifold Temperature (unable to result in power loss at sea level):	- °C 60*
Maximum Intake Manifold Temperature for Engine Protection:	- °C 85
Maximum intake air restriction (heavy duty air cleaner):	
clean filter:	- kPa 3.2
dirty filter:	- kPa 6.2
Maximum allowable pressure drop across charge air cooler and OEM CAC piping (CACDP):	- kPa 13

EXHAUST SYSTEM

Max. back pressure imposed by complete exhaust system:	- kPa 13
Maximum allowable static bending moment at exhaust outlet flange:	- N.m 19
Exhaust pipe size (recommendatory):	- mm 130

*When excess the temperature.the durability/reliability/performance of the engine maybe impaired.



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6

Curve Number

FR20379

CPL Code

3836

LUBRICATION SYSTEM

Oil pressure @ idle - minimum:	- kPa	82.7
Typical oil pressure range - warm engine:	- kPa	207 - 300
Total system capacity (standard pan):	- L	75.33
Maximum lube oil flow to all accessories:	- L/min	7.57

COOLING SYSTEM

Coolant Capacity (Engine Only):	- L	23.1
Engine coolant circuit thermostat opening temperature:	- °C	82
Engine coolant circuit thermostat fully open temperature:	- °C	94
Maximum coolant temperature - engine out:	- °C	102
Minimum operating block coolant temperature:	- °C	71
Maximum coolant temperature for engine protection controls:	- °C	107
Maximum coolant pressure(exclusive of pressure cap; closed thermostat at maximum no load speed):	- kPa	407
Minimum pressure cap rating at sea level:	- kPa	103
Maximum Coolant Friction Head External to Engine:	- kPa	75
Maximum deaeration time:	- min	25
Minimum fill rate (low level alarm required for most engines):	- L/min	19
Maximum coolant expansion space (% total system capacity):	- %	10
Minimum coolant expansion space (% total system capacity):	- %	6

FUEL SYSTEM

Maximum allowable restriction @ OEM point with maximum fuel flow:	- kPa	13.5
Maximum fuel drain restriction (total head) before (or without) check valve:.....	- kPa	27
Minimum fuel tank venting requirement:	- L/s	0.2
Maximum fuel inlet temperature:	- °C	71
Maximum heat rejection to return fuel.....	- kW	5.36
Maximum design fuel flow:	- kg/h	204

ELECTRICAL SYSTEM

System voltage:	- V	24
Minimum battery capacity-cold soak at -18 C (0 F) or above		
Engine only cold cranking amperes:	- CCA	900
Engine only reserve capacity:	- min	270

COLD START CAPABILITY

Minimum ambient temperature for unaided cold start:	- °C	-15
Minimum ambient temperature with Intake Air Heater(engine no load):	- °C	-30

Exhaust Emissions Data

Gaseous Emissions per GB 20891-2014:		1500 r/min
- Weight-Specific NOx+HC:	- g/kW.h	3.430
- Weight-Specific CO:	- g/kW.h	0.630
- Weight-Specific Particulates:	- g/kW.h	0.063



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6

Curve Number

FR20379

CPL Code

3836

Performance Data

All data is based on:

Engine operating with fuel system, water pump, lubricating oil pump and air cleaner; not included are alternator, fan, and optional equipment and driven components.

Test Condition:

- GB18297 Engine test code - Performance
- Barometric Pressure : 100 kPa (29.53 in Hg)
- Air Temperature: 25 °C (77 °F)
- Altitude: 80 m (263 ft)
- Relative Humidity: 50%

Steady State Stability Band at any constant load (+/-):

5%

		Standby Power		Prime Power	
Engine Speed	r/min	1500	1800	1500	1800
Gross Engine PowerOutput	kWm	374	410	328	360
Torque:	N.m	2381	2175	2088	1910
Brake Mean EffectivePressure	kPa	2302	2103	2018	1846
Piston Speed	m/s	8.15	9.78	8.15	9.78
Friction Horsepower	kW	31	45	31	45
Coolant Flow	L/min	407	483	407	483
Fuel Consumption	kg/h	78.2	86.1	70.2	76.3
Engine Data					
Intake Air Flow	m ³ /min.	28.7	33.9	27.3	33.2
Exhaust Gas Temp - DryStack	°C	497	452	484	438
Exhaust Gas Flow	kg/min.	35.2	41.5	33.3	40.5
Air to Fuel ratio		26.0	27.9	27.5	30.8
Heat Rejection to Ambient	kW	61	66	53	58
Heat Rejection to JacketCoolant	kW	150	166	134	153
Heat Rejection to Exhaust	kW	323	355	284	311
Heat Rejection to Fuel*	kW	5	5	5	5
ATA CAC					
Heat Rejection to Aftercooler	kW	88	106	76	99
TurbochargerCompressor Outlet	kPa	264	270	243	254
Charge Air Flow	kg/min	33.9	40.0	32.2	39.2
TurbochargerCompressor Outlet	°C	207	196	203	194

*This is the maximum heat rejection, not specified to the load listed.



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model



QSZ13-G6

Curve Number

FR20379

CPL Code

3836

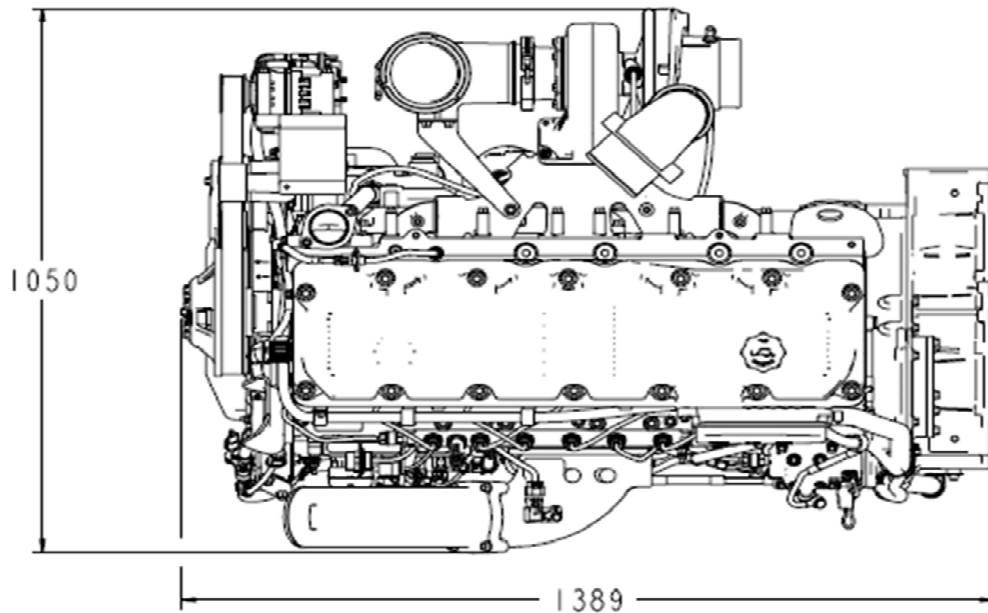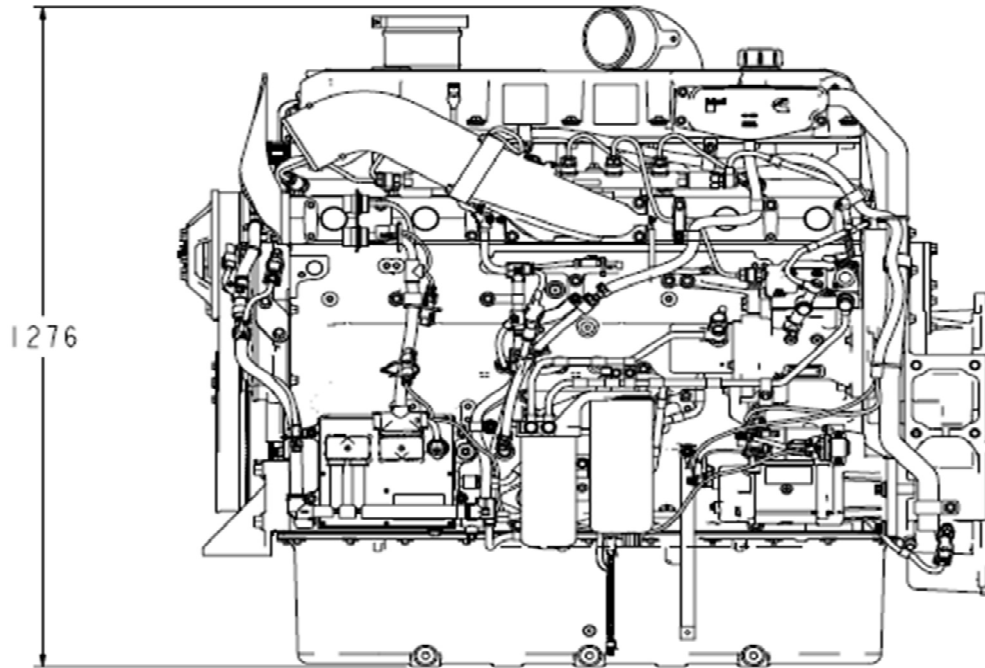



Generator Engine Performance Data

Dongfeng Cummins Engine Co.,Ltd
Xiangyang, Hubei Province, China

Engine Model

QSZ13-G6

Curve Number

FR20379

CPL Code

3836

STANDBY POWER RATING is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

CONTINUOUS POWER RATING is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

PRIME POWER RATING is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

Dongfeng Cummins Engine Co.,Ltd
Automobile Industry Development Zone, Xiangyang, Hubei Province
China 441004
Tel: 86-710-3399100
Fax: 86-710-3392893

End